


Seamless connectivity, smarter productivity.

Stay productive and connected with the ThinkVision T27D-40, designed to meet the demands of modern work. The 27-inch FHD IPS display features a 120Hz refresh rate that delivers smoother visuals. Eye Comfort 5-star certification and Eyesafe® 2.0 technology support comfortable all-day viewing, while USB-C docking with up to 100W Power Delivery¹ and an integrated USB hub simplify connectivity for a cleaner, more efficient workspace.

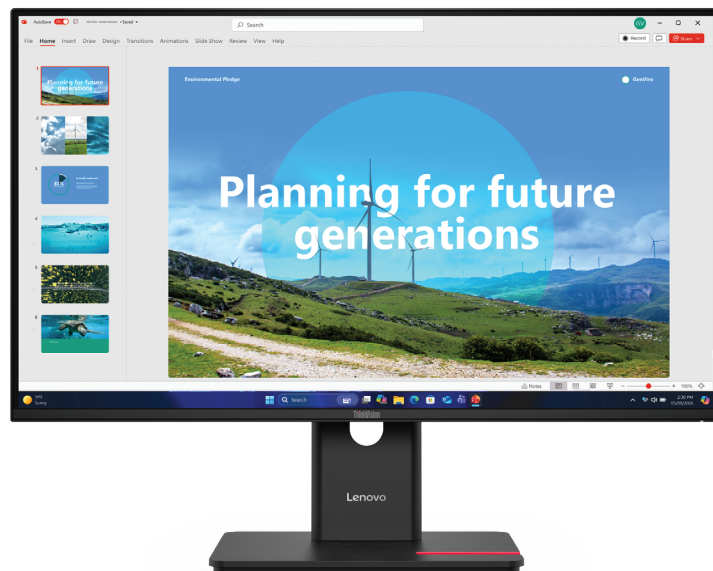

Clarity that keeps you productive

- **Smooth visuals with true-to-life color**
A 27-inch FHD In-Plane Switching (IPS) display delivers wide viewing angles and consistent image quality for professional work, while 99% sRGB and 99% BT.709 color coverage help ensure accurate and reliable color performance.
- **Enhanced Eye Comfort**
TÜV Rheinland Eye Comfort 5-star certification and Eyesafe® 2.0 technology help reduce harmful blue light and support greater comfort throughout the day without compromising visual quality.



Seamless connectivity for modern workspaces

- **One-cable docking and USB hub**
USB-C docking with up to 100W Power Delivery¹ simplifies connectivity by supporting display, data transfer, and device charging through a single cable connection. A built-in USB hub with USB-A and USB-C ports keeps essential accessories conveniently connected.
- **Expanded screen real estate**
Daisy chain support for up to two displays helps simplify multi-monitor setups, expanding screen space for easier multitasking while reducing cable clutter. Complemented by a 4-side ultra-thin bezel design, it creates a cleaner and more seamless viewing experience across multiple screens.
- **Simplified power control**
The Mirrored Power Button lets you conveniently power on, shut down, or wake a connected Lenovo notebook directly from the monitor for a smoother workflow experience.



Smarter software for simplified management

- **Centralized monitor management**
Lenovo Display Fleet Manager (LDFM)² software streamlines remote monitor management with tools for asset tracking, firmware upgrades, and centralized display settings control across large device fleets.
- **Intuitive display customization**
Lenovo Accessories and Display Manager (LADM)² software enables quick and intuitive display adjustments, helping users personalize their viewing experience or manage connected devices with ease.

Lenovo ThinkVision T27D-40 Monitor

Specifications

Display	
Panel Size	27-inch
Screen Dimensions	607.1 mm x 350.6 mm
Panel Type	4-sided Ultra Thin In-Plane Switching
Active Area	597.9 mm x 336.3 mm
Backlight	WLED
Aspect Ratio	16:9
Resolution	1920 x 1080
Pixel Pitch	0.3114 mm x 0.3114 mm
Dot/Pixel Per Inch (DPI/PPI)	82
Viewing Angle (H x V @ CR 10:1)	178° / 178°
Response Time (G to G)	4ms (Extreme Mode), 6ms (Normal Mode)
Refresh Rate	48Hz-120Hz HDMI
Brightness	300 cd/m ²
Contrast Ratio (Typical)	1500:1
Dynamic Contrast Ratio (Typical)	3M:1
Color Gamut (Coverage Ratio)	99% sRGB (CIE 1931), 99% BT.709 (CIE 1931)
Color Support (Typical)	16.7 Million
Color Depth	8-bit (6+FRC)

Connectivity	
Video Signal	1 x HDMI 1.4 ² 1 x DP 1.4 (HBR2) ⁴ 1 x DP 1.4 Out 1 x USB Upstream
Ethernet (RJ45)	Yes (1G)
USB Upstream	1 x USB-C ⁵ (USB 5Gbps / USB 3.2 Gen 1 ⁶ , PD3.0 up to 100W, DP 1.4 Alt Mode HBR2)
USB Downstream	3 x USB-A (USB 5Gbps / USB 3.2 Gen 1 ⁶ , 1 x BC 1.2) 1 x USB-C (USB 5Gbps / USB 3.2 Gen 1 ⁶ , up to 15W PD (data only))

Multimedia	
Modular Camera/ Speaker Support	Yes (Optional Support) ⁷

Special Features	
Software	LDFM (Lenovo Display Fleet Manager) and LADM (Lenovo Accessories and Display Manager) ²
Natural Low Blue Light	Yes
Multi-sync	Yes
Mirrored Power Button	Yes

Power	
Power Consumption (Typ./Max.)	16.0W / 160.0W
Power Consumption Sleep/Off Mode	< 0.5W
Power Consumption Switch-Off Mode	< 0.3W
Energystar Power Consumption (Pon/E _{TEC})	15.5W / 55.8kWh
Power Supply	Internal
Voltage Required	AC 100 to 240 V (50-60Hz)

Mechanical	
Tilt Angle (Front / Back)	-5° / 23.5°
Swivel	-45° / 45°
Lift (Max. Range)	155 mm
Pivot	-90° / 90°
VESA Mount Capability	Yes (100 x 100 mm)
ThinkCentre M Series Tiny Support	Yes, by ThinkCentre Tiny Mounting Kit (PN: 4XFIR07369) ⁸
Humanscale Monitor Arm Support	Yes (PN: 4ZEIU10764, 4ZEIU10765, 4ZEIU10766, 4ZEIU10767)
Kensington Lock Slot	Yes (2.5 mm x 6 mm)
Cable Management	Yes
Bezel Color	Eclipse Black
The Minimum Thickness of Head	18.0 mm
Bezel Width (Side)	2.0 mm
Bezel Width (Top)	2.0 mm
Bezel Width (Bottom)	10.4 mm

Dimension & Weight	
Size Packed (W x D x H, mm/inch)	690.0 x 150.0 x 420.0 mm 27.17 x 5.91 x 16.54 inches
Size Unpacked with Stand (Highest Position) (W x D x H, mm/inch)	611.9 x 195.0 x 537.8 mm 24.09 x 7.68 x 21.17 inches
Size Unpacked with Stand (Lowest Position) (W x D x H, mm/inch)	611.9 x 195.0 x 382.8 mm 24.09 x 7.68 x 15.07 inches
Size Unpacked without Stand (Head Only) (W x D x H, mm/inch)	611.9 x 46.0 x 355.2 mm 24.09 x 1.81 x 13.98 inches
Weight Packed (kg / lbs.)	9.6 kg / 21.2 lbs.
Weight Unpacked (kg / lbs.)	6.9 kg / 15.2 lbs.
Weight (Head only) (kg / lbs.)	4.7 kg / 10.4 lbs.

What's in the Box	
Monitor with Stand	Yes
Power Cable (Cable Length)	1 x Power Cable (1.8 m)
DP Cable (Cable Length)	1 x DP 1.4 Cable (1.8 m)
USB Cable (Cable Length)	1 x USB Type-C to Type-C Gen 1 Cable (1.8 m, 5Gbps)
Quick Setup Guide	Yes
Warranty booklet	Yes

Certification	
ENERGY STAR Certification	Yes
TCO	10
TCO Edge	2.1
EPEAT	Gold
RoHS (2011/65/EU)	Yes
Volatile Organic Compound Certification	Yes
Windows Certification	Windows 10, Windows 11
EU Energy Level Certification	Yes (Level D)
China Energy Efficiency Standard	Tier 1
TÜV Rheinland® Eye Comfort	Yes (5 Stars)
TÜV Rheinland® Low Blue Light (Hardware Solution)	Yes
TÜV Rheinland® Flicker Free	Yes
Eyesafe Display Certification	Yes (Eyesafe 2.0)



¹ The output rating (100W, 20V/5A) is designed based on Lenovo VDM developed by Lenovo. This product can achieve the output rating (100W, 20V/5A) when connected to products that support Lenovo VDM developed by Lenovo. | ² Formerly Lenovo Display Control Center. Supports Windows 10 and 11, and macOS (functions vary across systems). | ³ Supports 1920 x 1080 @ 120Hz as specified in HDMI 1.4. | ⁴ Supports max. bandwidth 21.6 Gbps. | ⁵ USB Type-C and USB-C are registered trademarks of USB Implementers Forum. | ⁶ The transfer speed of following ports will vary and, depending on many factors such as the processing capability of peripheral devices, file attributes, and other factors related to system configuration and operating environments, the actual transfer rate using the various USB connectors on this device will vary and is typically slower than the data rates as defined by the respective USB specifications: 5Gbit/s for USB 3.2 Gen 1; 10Gbit/s for USB 3.2 Gen 2; and 20Gbit/s for USB 3.2 Gen 2x2. | ⁷ Compatible with ThinkVision VoIP Stack MC60 Monitor Webcam and MS30 Monitor Soundbar. | ⁸ Sold separately. Need to assemble ThinkCentre Tiny Mounting Kit (PN: 4XFIR07369) to support Tiny PC installation.

