

Dell Pro 14 Premium

PA14260

Setup and Specifications

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Chapter 1: Views of Dell Pro 14 Premium PA14260.....	5
Right view.....	5
Left view.....	5
Top view.....	6
Top (for computers shipped with Collaboration Touchpad).....	7
Front view.....	8
Bottom view.....	9
Locate the Service Tag or Express Service Code label of your computer.....	10
Battery-status light.....	10
Chapter 2: Set up your Dell Pro 14 Premium PA14260.....	12
Chapter 3: Specifications of Dell Pro 14 Premium PA14260.....	14
Dimensions and weight.....	14
Processor.....	14
Chipset.....	15
Operating system.....	15
Memory.....	16
External ports and slots.....	16
Internal slots.....	17
Wireless module.....	17
WWAN module.....	17
Audio.....	19
Storage.....	19
Keyboard.....	19
Keyboard shortcuts of Dell Pro 14 Premium PA14260.....	20
Camera.....	22
Touchpad.....	22
Touchpad with collaboration controls (optional).....	23
Power adapter.....	24
Power adapter requirements.....	24
Battery.....	25
Power requirements (for 2-cell, 40 Wh battery).....	26
Power requirements (for 3-cell, 60 Wh battery).....	26
Display.....	27
Fingerprint reader (optional).....	28
Sensors	28
GPU—Integrated.....	29
External display support.....	29
Hardware security.....	29
Operating and storage environment.....	29
Dell low blue light display.....	30
Dell Optimizer.....	30
Dell support policy.....	30

Chapter 4: Getting help and contacting Dell Technologies..... 31

Chapter 5: Revision history..... 32

Views of Dell Pro 14 Premium PA14260

Right view



Figure 1. Right view

1. nanoSIM-card slot (optional)

Insert a nano-SIM card to connect to a mobile broadband network.

2. Headset (headphone and microphone combo) port

Supports connection of headphones or combo headsets with integrated microphone for audio input and output.

3. USB 3.2 Gen 1 port with PowerShare

Supports data transfer speed up to 5 Gbps for connecting external storage and peripheral devices. Provides power output capability for charging compatible devices even when the computer is turned off.

4. Security-cable slot (wedge-shaped)

Provides a slot for a cable lock to secure the computer against unauthorized removal or movement.

Left view

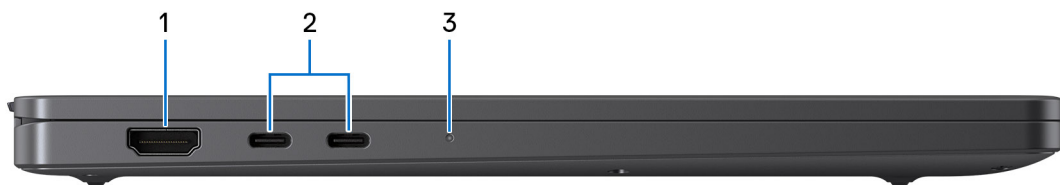


Figure 2. Left view

1. HDMI 2.1 port

Connect to a TV, external display or another HDMI-in enables device. Provides video and audio output.

2. Thunderbolt 4 (40 Gbps) port with DisplayPort Alt Mode/USB Type-C/USB4/Power Delivery

Transfers data at high speed, charges your device, and connects to external displays—all through one port:

- **Thunderbolt 4:** Offers up to 40 Gbps data transfer speed, enabling ultrafast file transfers, external SSDs, and high-performance peripherals.
- **DisplayPort Alt Mode:** Allows video output to external monitors, making it ideal for docking stations or multimonitor setups. Compatible with USB-C to HDMI/DP adapters and docking stations.
- **USB4 Compatibility:** Ensures broad support for USB devices with efficient bandwidth sharing and backward compatibility with USB 3.2, USB 2.0, and Thunderbolt 3.
- **Power Delivery (PD):** Supports charging of laptops, tablets, and other devices with up to 100 W power through the same port, reducing the need for separate power adapters.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

3. Battery-status light

Indicates the battery-charge status.

- Solid white: Battery is charging.
- Solid amber: Battery charge is low.
- Off: Battery is fully charged.

Top view



Figure 3. Top view

1. Privacy shutter

Features a manual privacy shutter that can slide to access the camera lens and slide over to block its view and safeguard your privacy when the camera is not in use.

2. Power button with optional fingerprint reader

Provides standard power control (on/off). If equipped with a fingerprint reader, it also supports secure user authentication through a single touch. To verify fingerprint functionality during diagnostics, check login behavior at the operating system level and confirm sensor detection through Device Manager or BIOS settings.

NOTE: The power-button behavior can be customized in the operating system.

3. **Speakers**

Provides audio output.

4. **Zero-Lattice Keyboard with battery-saving backlight**

Features a compact keyboard with larger keycaps for improved accuracy and a battery-saving mini-LED backlight.

5. **Touchpad**

Used to move the mouse pointer. You can tap, swipe, or drag your finger to click, scroll, or move items on the screen—just like using a mouse.

Top (for computers shipped with Collaboration Touchpad)



Figure 4. Top view

1. **Privacy shutter**

Features a manual privacy shutter that can slide to access the camera lens and slide over to block its view and safeguard your privacy when the camera is not in use.

2. **Power button with optional fingerprint reader**

Provides standard power control (on/off). If equipped with a fingerprint reader, it also supports secure user authentication through a single touch. To verify fingerprint functionality during diagnostics, check login behavior at the operating system level and confirm sensor detection through Device Manager or BIOS settings.

NOTE: The power-button behavior can be customized in the operating system.

3. Speakers

Provides audio output.

4. Zero-Lattice Keyboard with battery-saving backlight

Features a compact keyboard with larger keycaps for improved accuracy and a battery-saving mini-LED backlight.

5. Microphone control (Supported only when using the Zoom and Microsoft Teams apps)

Mute or unmute your microphone with a tap during Zoom or Microsoft Teams calls. The microphone control indicates the status of the microphone as follows:

- Red – The microphone is muted.
- White – The microphone is unmuted.

6. Chat box control (Supported only when using the Zoom and Microsoft Teams apps)

Quickly show or hide the chat window during Zoom or Microsoft Teams calls with a tap. A blinking indicator alerts you to new messages, helping you stay responsive without interrupting your workflow.

7. Screen share control (Supported only when using the Zoom and Microsoft Teams apps)

Easily start or stop screen sharing during Zoom or Microsoft Teams meetings with a single tap.

8. Webcam control (Supported only when using the Zoom and Microsoft Teams apps)

Quickly turn your webcam on or off with a simple tap during Zoom or Microsoft Teams meetings. The webcam control indicates the status of the camera as follows:

- Red – The camera is turned off.
- White – The camera is turned on.

Front view



Figure 5. Front view

1. Infrared camera

Enables secure, contactless user authentication by supporting facial recognition through Windows Hello.

2. Infrared emitter

Emits infrared light to support the infrared camera in detecting facial features and tracking motion for secure and responsive functionality.

3. Camera

Enables video calls, photo capture, and recording.

4. Camera-status light

Illuminates automatically to indicate active camera usage, alerting users when the camera is recording or streaming.

5. Ambient-light sensor

Detects ambient lighting and dynamically regulates display and capacitive touch function row brightness to enhance visual comfort and conserve power.

6. Display

Provides visual output.

Bottom view

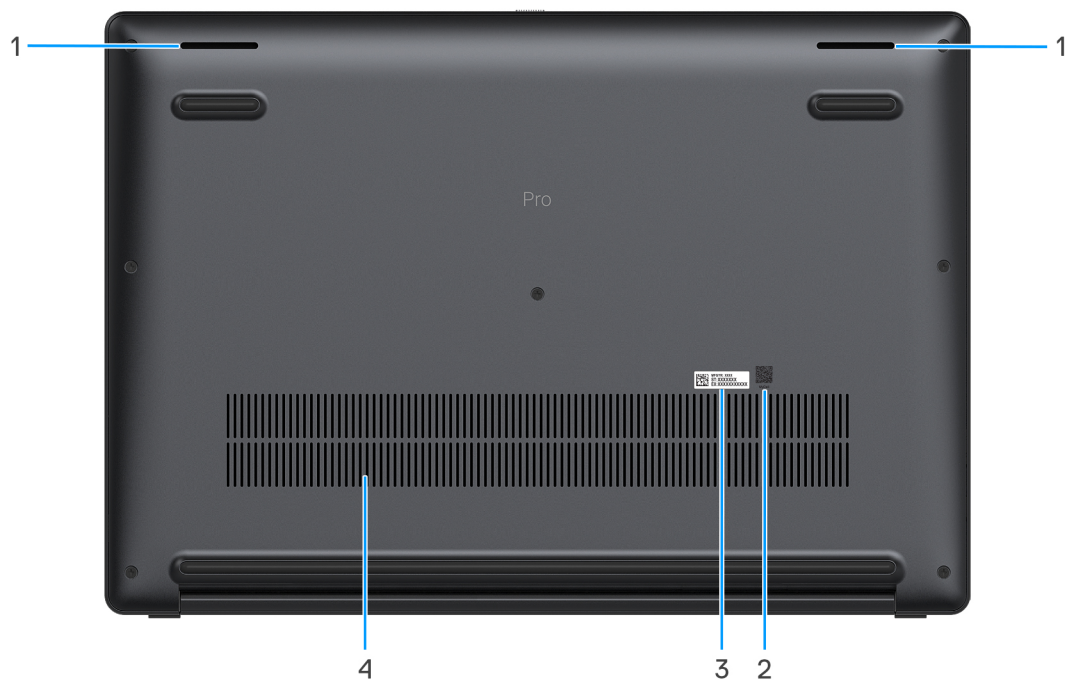


Figure 6. Bottom view

1. Speakers

Provide audio output.

2. MyDell QR code

MyDell is your hub for content personalized to your Dell Pro 14 Premium PA14260, including videos, articles, manual, and easy access to support.

3. Service Tag label

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

4. **Air vents**

Provides ventilation for your computer. Clogged air vents can cause overheating and can affect the performance of your computer and potentially cause hardware issues. Keep the air vents clear of obstructions and clean them regularly to prevent the build-up of dust and dirt. For more information about cleaning air vents, see [Dell Support Site](#).

Locate the Service Tag or Express Service Code label of your computer

The Service Tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag. For more information about how to find the Service Tag of your computer, search [Dell Support Site](#).



Figure 7. Service Tag/Express Service Code location

Battery-status light

The following table lists the battery-status light of your Dell Pro 14 Premium PA14260.

Table 1. Battery-status light behavior

Power source	LED behavior	System power state	Battery charge level
AC adapter	Off	S0 or S5	100%
AC adapter	Solid white	S0 or S5	< 100%
Battery	Off	S0 or S5	11-100%
Battery	Solid amber	S0 or S5	< 10%

- S0 (ON): The computer is turned on.
- S3 (Sleep): Screen is off, and the computer is in sleep mode.

- S4 (Hibernate): The computer consumes the least power in the Hibernate state than in the ON or OFF state. The computer is almost in the OFF state. The context data is written to a storage device, allowing you to resume from where you left after the computer is turned on.
- S5 (OFF): The computer is in a shutdown state.

Set up your Dell Pro 14 Premium PA14260

About this task

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

Steps

1. Connect the power adapter and press the power button.

NOTE: To conserve battery power, the battery might enter power-saving mode. Ensure that the power adapter is connected before turning on the computer.



Figure 8. Connect the power adapter and press the power button

2. Finish the operating system setup.

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, it is recommended that you:


- Connect to a network for Windows updates.

NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the Internet, sign-in with an existing Microsoft account or create an account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu. This step is optional but recommended.

Table 2. Locate Dell apps

Resources	Description
	Dell Optimizer is an application that is designed to enhance computer performance and productivity by optimizing settings for power, battery, display, collaboration touchpad, and presence detection. It also provides access to applications purchased with your new computer. For more information, see Dell Optimizer User's Guide at Dell Support Site.
	Dell Product Registration Register your computer with Dell.
	Dell Help & Support Access help and support for your computer.
	SupportAssist SupportAssist is a proactive and predictive technology that offers automated technical support for Dell computers. It proactively monitors both hardware and software, addressing performance issues, preventing security threats, and automating engagement with Dell Technical Support. For more information, see the SupportAssist documentation at Dell Support Site.  NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.

Specifications of Dell Pro 14 Premium PA14260

Dimensions and weight

The following table lists the height, width, depth, and weight of your Dell Pro 14 Premium PA14260.

Table 3. Dimensions and weight

Description	For computers shipped with WUXGA display	For computers shipped with WQXGA IPS display	For computers shipped with WQXGA Tandem OLED display	For computers shipped with WUXGA Lightweight display
Height:				
Front height	0.45 in. (11.40 mm)	0.45 in. (11.40 mm)	0.43 in. (10.86 mm)	0.43 in. (10.95 mm)
Rear height	0.63 in. (16.02 mm)	0.63 in. (16.02 mm)	0.57 in. (14.59 mm)	0.59 in. (15 mm)
Peak height	0.78 in. (19.85 mm)	0.78 in. (19.85 mm)	0.66 in. (16.78 mm)	0.69 in. (17.60 mm)
Width	12.25 in. (311.20 mm)			
Depth	8.53 in. (216.70 mm)			
Weight  NOTE: The weight of your computer depends on the configuration that you ordered.	Minimum: 2.88 lbs (1.31 kg)	Minimum: 2.68 lbs (1.22 kg)	Minimum: 2.61 lbs (1.19 kg)	Minimum: 2.53 lbs (1.15 kg)

Processor

The following table lists the details of the processors that are supported on your Dell Pro 14 Premium PA14260.

Table 4. Processor

Description	Option one	Option two	Option three
Type	Intel Core Ultra 5 335 vPro	Intel Core Ultra 7 365 vPro	Intel Core Ultra 7 366H vPro
Wattage	25 W	25 W	25 W
Total cores	8	8	16
Number of Performance-cores	4	4	4
Number of Efficient-cores	0	0	8
Number of low power efficient-cores	4	4	4
Total threads	8	8	16

Table 4. Processor (continued)

Description	Option one	Option two	Option three
 NOTE: : Intel Hyper-Threading Technology is only available on Performance-cores.			
Speed	4.6 GHz	4.8 GHz	4.8 GHz
Performance-core frequency			
Base frequency	2.2 GHz	2.4 GHz	2 GHz
Maximum turbo frequency	4.6 GHz	4.8 GHz	4.8 GHz
Efficient-core frequency			
Base frequency	1.6 GHz	1.8 GHz	1.6 GHz
Maximum turbo frequency	3.4 GHz	3.6 GHz	3.6 GHz
Cache	12 MB	12 MB	18 MB
Integrated graphics	Intel Graphics	Intel Graphics	Intel Graphics
AI technology	Intel AI Boost	Intel AI Boost	Intel AI Boost
Neural Processing Unit (NPU) performance	47 TOPS	49 TOPS	50 TOPS
 NOTE: Tera Operations Per Second (TOPS) is an AI performance metric that measures how many trillions of operations per second an AI processor can perform.			

Chipset

The following table lists the details of the chipset that is supported by your Dell Pro 14 Premium PA14260.

Table 5. Chipset

Description	Values
Chipset	Integrated in the processor
Processor	Intel Core Ultra 5/Intel Core Ultra 7
DRAM bus width	64-bit
Flash EPROM	64 MB
PCIe bus	Up to Gen4

Operating system

Your Dell Pro 14 Premium PA14260 supports the following operating systems:

Windows 11 25H2 and later versions.

Memory

The following table lists the memory specifications of your Dell Pro 14 Premium PA14260.

Table 6. Memory specifications

Description	Values
Memory slots	Onboard memory  NOTE: The memory is integrated on the system board and is not upgradeable.
Memory type	Dual-channel LPDDR5X
Memory speed	8533 MT/s (for Intel Core Ultra 7 366H vPro) 7467 MT/s (for Intel Core Ultra 5 335 vPro and Intel Core Ultra 7 365 vPro)
Maximum memory configuration	64 GB
Minimum memory configuration	16 GB
Memory configurations supported	For Intel Core Ultra 7 366H vPro: 16 GB: LPDDR5X, 8533 MT/s, dual-channel 32 GB: LPDDR5X, 8533 MT/s, dual-channel 64 GB: LPDDR5X, 8533 MT/s, dual-channel For Intel Core Ultra 5 335 vPro and Intel Core Ultra 7 365 vPro: 16 GB: LPDDR5X, 7467 MT/s, dual-channel 32 GB: LPDDR5X, 7467 MT/s, dual-channel

External ports and slots

The following table lists the external ports and slots on your Dell Pro 14 Premium PA14260.

Table 7. External ports and slots

Description	Values
USB ports	- Two Thunderbolt 4 (40 Gbps) with DisplayPort Alt Mode/USB Type-C/USB4/Power Delivery ports - One USB 3.2 Gen 1 (5 Gbps) with PowerShare port
Audio port	One headset (headphone and microphone combo) port
Video port(s)	- Two Thunderbolt 4 (40 Gbps) with DisplayPort Alt Mode/USB Type-C/USB4/Power Delivery ports - One HDMI 2.1 port
Media-card reader	Not supported
Power-adaptor port	Supported through one of the following: 65 W AC adapter, USB Type-C 60 W AC small form factor adapter, USB Type-C 60 W AC small form factor adapter, USB Type-C, 2-pin 100 W AC adapter, USB Type-C 65 W USB-C GAN Slim Adapter (2-pin, wall mount)

Table 7. External ports and slots (continued)

Description	Values
Security-cable slot	One security-cable slot (wedge-shaped)
SIM-card slot	One nanoSIM-card slot (optional)

Internal slots

The following table lists the internal slots of your Dell Pro 14 Premium PA14260.

Table 8. Internal slots

Description	Values
M.2	- One M.2 2230 slot for solid-state drive - One M.2 3052 slot for 5G WWAN card  NOTE: To learn more about the features of different types of M.2 cards, search Dell Support Site.

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module that is supported on your Dell Pro 14 Premium PA14260.

Table 9. Wireless module specifications

Description	Values
Model number	Intel BE211
Transfer rate	Up to 5760 Mbps
Frequency bands supported	2.4 GHz/5 GHz/6 GHz
Wireless standards	- Wi-Fi 802.11a/b/g - Wi-Fi 4 (Wi-Fi 802.11n) - Wi-Fi 5 (Wi-Fi 802.11ac) - Wi-Fi 6E (Wi-Fi 802.11ax) - Wi-Fi 7 (Wi-Fi 802.11be)
Encryption	64-bit/128-bit WEP - AES-CCMP - TKIP
Bluetooth wireless card  NOTE: The functionality of the Bluetooth wireless card may vary based on the operating system.	Bluetooth 6.0 wireless card

WWAN module

The following table lists the Wireless Wide Area Network (WWAN) module that is supported in your Dell Pro 14 Premium PA14260.

 **NOTE:** The WWAN module is available only on certain configurations and in certain regions.

NOTE: Availability of the eSIM feature on this module may vary depending on your region and the support that is offered by your mobile carrier.

NOTE: For instructions on how to setup SIM or eSIM connections on your computer, see the *SIM/eSIM Setup Guide for Windows* available with your product documentation at [Dell Support Site](#).

Table 10. WWAN module specifications

Description	Values
Model number	Qualcomm Snapdragon X72 Global 5G Modem (DW5934e)
Form factor	M.2 3052 Key-B
Host interface	PCIe Gen3
Network standard	NR FR1 (Sub6) FDD/TDD, LTE FDD/TDD, WCDMA/HSPA+, GPS/GLONASS/Galileo/Beidou
Transfer data rate	5G NR: DL 4.14 Gbps/UL 900 Mbps - LTE: DL 2.0 Gbps (CAT20)/UL 211 Mbps (CAT18) - UMTS: DL DC-HSPA+ Rel8:42 Mbps/UL 5.76 Mbps
Operating frequency bands	- NR (n1, n2, n3, n5, n7, n8, n12, n13, n14, 18, n20, n25, n26, n28, n29, n30, n38, n40, n41, n48, n66, n67, n70, n71, n75, n76, n77, n78, n79, n91, n92, n93, n94) - LTE (B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B67, B68, B70, B71) - WCDMA/HSPA+ (1, 2, 4, 5, 8)
Power supply	DC 3.135 V to 3.63 V, typical 3.30 V
SIM card	Supported through external SIM slot
eSIM with dual SIM (DSSA)	Supported NOTE: The availability of eSIM functionality embedded on the module is dependent on the region and specific carrier requirements.
Antenna diversity	Supported
Radio on/off	Supported
Wake On Wireless WAN	Not supported
Operating temperature	- Normal operating temperature: -30°C (-22°F) to +70°C (158°F) - Extended operating temperature: -40°C (-40°F) to +85°C (185°F) - Storage temperature: -40°C (-40°F) to +85°C (185°F)
Antenna connector	- WWAN main antenna x1 - WWAN diversity antenna x1 4x4 MIMO antenna x2
NOTE: For instructions to find your computer's International Mobile Equipment Identity (IMEI) number, search Dell Support Site .	

Audio

The following table lists the audio specifications of your Dell Pro 14 Premium PA14260.

Table 11. Audio specifications

Description	Values
Audio controller	Cirrus CS42L43 and Cirrus CS35L56A (AMP)
Stereo conversion	Supported
Internal audio interface	SoundWire audio interface
External audio interface	One headset (headphone and microphone combo) port
Number of speakers	Four
Internal-speaker amplifier	Supported (audio codec integrated) + CS35L56A (AMP)
External volume controls	Keyboard shortcut controls
Speaker output:	
Average	2 W
Peak	2.5 W
Microphone	Digital-array microphones in camera assembly

Storage

This section lists the storage options on your Dell Pro 14 Premium PA14260.

Your Dell Pro 14 Premium PA14260 supports one M.2 2230 solid-state drive which is the primary drive of your computer.

Table 12. Storage specifications

Storage type	Interface type	Capacity
M.2 2230 solid-state drive	PCIe Gen4 NVMe	256 GB/512 GB/1 TB/2 TB
M.2 2230 solid-state drive, Self-encrypting drive, Opal 2.0	PCIe Gen4 NVMe	512 GB

Keyboard

The following table lists the keyboard specifications of your Dell Pro 14 Premium PA14260.

Table 13. Keyboard specifications

Description	Values
Keyboard type	Zero-Lattice keyboard with battery-saving backlight
Keyboard layout	QWERTY

Table 13. Keyboard specifications (continued)

Description	Values
Number of keys	- English US, English International, Arabic, Canada (Bilingual) (MUI), Chinese (Traditional), French (Canadian), Greek, Hebrew, Korean, Russian, Thai, Ukrainian: 79 keys - French-Canadian Quebec, Belgian, Bulgarian, Czech/Slovak (MUI), Danish, English UK, Estonian, French (European), German, Hungarian, Icelandic, Italian, Nordic (MUI), Norwegian, Portuguese, Spanish (Castilian), Spanish (Latin America), Swedish/Finnish, Swiss European (MUI), Turkish, Turkish (F): 80 keys - Japanese: 83 keys - Portuguese (Brazil): 81 keys
Key pitch	Horizontal = 18.05 mm Vertical = 18.05 mm
Keyboard shortcuts	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. - To type the alternate character, press Shift and the desired key. - To perform secondary functions, press Fn and the desired key. i NOTE: You can define the primary behavior of the function keys (F1–F12) by changing Function Key Behavior in the BIOS Setup program. i NOTE: If Co-pilot in Windows is not available on your computer, pressing the Co-pilot key launches Windows search. For more information about Co-pilot in Windows, search Dell Support site. For more information, see Keyboard function keys.

Keyboard shortcuts of Dell Pro 14 Premium PA14260

i **NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys that are used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol that is shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol that is shown on the upper part of the key is typed out. For example, if you press **2**, 2 is typed out; if you press **Shift + 2**, @ is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multimedia control, as indicated by the icon on the key. Press the function key to enable the task represented by the icon. For example, pressing F1 mutes the audio (see the table below).

However, if the function keys F1-F12 are needed for specific software applications, multimedia functionality can be disabled by pressing **Fn + Esc**. Later, multimedia control can be invoked by pressing **Fn** and the respective function key. For example, mute audio by pressing **Fn + F1**.

i **NOTE:** You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in the BIOS setup program.

Table 14. Function key primary behavior

Function key	Primary behavior
F1	Mute or unmute audio

Table 14. Function key primary behavior (continued)

Function key	Primary behavior
F2	Decrease volume
F3	Increase volume
F4	Microphone Mute
F5	Keyboard Illumination/Backlight
F6	Decrease brightness
F7	Increase brightness
F8	Switch to external display
F10	Print screen
F11	Home
F12	End

The **Fn** key is also used with selected keys on the keyboard to invoke secondary functions.

Table 15. Secondary behavior

Function key	Secondary behavior
Fn + S	Toggle Scroll lock
Fn + B	Pause the current process
Fn + Ctrl + B	Break command
Fn + R	Activate system request function
Fn + left arrow	Move the cursor to start of the line
Fn + right arrow	Move the cursor to end of the line
Fn + Shift + B	Enable unobstrusive mode to reduce onscreen distraction
Fn + Ctrl	Open the application menu
Fn + Esc	Toggle between multimedia and function key behavior
Fn + PgUp	Scroll up the document or page
Fn + PgDn	Scroll down the document or page
Fn + Home	Move to the beginning of the document
Fn + End	Move to the end of the document
Copilot	Launch Copilot in Windows NOTE: If Copilot in Windows is not available on your computer, the Copilot key launches Recall. If both Recall and Copilot in Windows are not available on your computer, the Copilot key launches Windows Search. For more information about Copilot in Windows and Recall, search in the Knowledge Base Resource at the Dell Support Site.

Camera

The following table lists the camera specifications of your Dell Pro 14 Premium PA14260.

Table 16. Camera specifications

Description	Values
Number of cameras	Two
Camera type	There are two camera options: • IR Camera • IR Camera with Presence Detection (Synaptics)
Camera location	Front
Camera sensor type	CMOS sensor technology
Camera resolution:	
Still image	8.0 megapixel
Video	2560 x 1440 at 30 fps
Infrared camera resolution:	
Video	640 x 360 at 30 fps
Diagonal viewing angle:	
Camera	88.10 degrees
Infrared camera	86.60 degrees

Touchpad

The following table lists the touchpad specifications of your Dell Pro 14 Premium PA14260.

Table 17. Touchpad specifications

Description	Values
Touchpad resolution:	>300 DPI
Touchpad dimensions:	
Horizontal	125 mm (4.92 in.)
Vertical	75 mm (2.95 in.)
Touchpad gestures	For more information about the touchpad gestures available on Windows, search Microsoft Support Site .

Touchpad with collaboration controls (optional)

The following table lists the touchpad specifications of your Dell Pro 14 Premium PA14260 (for computers shipped with Collaboration Touchpad).

Table 18. Touchpad specifications

Description	Values
Touchpad type	Collaboration Touchpad
Collaboration controls on touchpad	Four controls are available to control video, share screen, chat, and mute functions during conference calls. The controls are visible on the touchpad during any conference calls. Compatible with Zoom and Microsoft Teams app.
Collaboration controls settings	- Control brightness manually or configure icon brightness to automatically adjust to the ambient light. - Customize settings to activate collaboration controls with a single tap or a double tap. - Customize specific controls to be activated or deactivated.
Collaboration controls functionality	Video icon: Turn on or off the camera. - White icon: The camera is turned on. - Red icon: The camera is off. Share screen icon: Tap once to share your screen. Tap again to stop sharing. Chat icon: Show or hide the chat window. The icon blinks when you receive a new chat message. Microphone icon: Turn on or mute the microphone. - White icon: The microphone is turned on. - Red icon: The microphone is muted.
Required apps for collaboration controls	- Dell Optimizer version 6.3 or higher - Zoom Client version 5.9.3 or higher - Microsoft Teams (Windows desktop) version 1.6.00.24078 and higher
Touchpad resolution:	
Horizontal	>300 dpi
Vertical	Not supported
Touchpad dimensions:	
Horizontal	125 mm (4.92 in.)
Vertical	71 mm (2.79 in.)
Touchpad gestures	For more information about touchpad gestures available on Windows, see the Microsoft Knowledge Base article at Microsoft Support Site .
NOTE: To enjoy the collaboration touchpad (CTP) controls feature on your keyboard, ensure that you have the latest versions of the Dell Optimizer app and Zoom or Microsoft Teams app that is installed on your computer. Dell Optimizer offers a modular installation which allows you to select the modules you want to install. Install the collaboration touchpad module within the Dell Optimizer app to enjoy the functionality of collaboration controls. For more information, search for <i>Dell Optimizer</i> in the Knowledge Base Resource at the Dell Support Site. NOTE: For more information about how to configure and use your collaboration controls, search for the Collaboration Touchpad Reference Guide in the Knowledge Base Resource at Dell Support Site. Or, watch the video at Dell Collaboration Touchpad.	

Power adapter

The following table lists the power adapter specifications of your Dell Pro 14 Premium PA14260.

Table 19. Power-adapter specifications

Description	Option one	Option two	Option three	Option four	Option five
Type	65 W AC adapter, USB Type-C	60 W AC small form factor adapter, USB Type-C	60 W AC small form factor adapter, USB Type-C, 2-pin	100 W AC adapter, USB Type-C	65 W USB-C GAN Slim Adapter (2-pin, wall mount)
Power-adapter dimensions:					
Height	28 mm (1.10 in.)	22 mm (0.86 in.)	55 mm (2.16 in.)	26.50 mm (1.04 in.)	31.00 mm (1.22 in.)
Width	51 mm (2 in.)	55 mm (2.16 in.)	66 mm (2.59 in.)	60 mm (2.36 in.)	41.50 mm (1.63 in.)
Depth	122 mm (4.80 in.)	66 mm (2.59 in.)	22 mm (0.86 in.)	122 mm (4.80 in.)	48.50 mm (1.91 in.)
Input voltage	100 VAC–240 VAC	100 VAC–240 VAC	100 VAC–240 VAC	100 VAC–240 VAC	100 VAC–240 VAC
Input frequency	50 Hz–60 Hz	50 Hz–60 Hz	50 Hz–60 Hz	50 Hz–60 Hz	50 Hz–60 Hz
Input current (maximum)	1.7 A	1.7 A	1.7 A	1.7 A	1.7 A
Output current (continuous)	3 A/3 A/3 A/3.25 A	20 V/3 A (continuous) 15 V/3 A (continuous) 9 V/3 A (continuous) 5 V/3 A (continuous)	20 V/3 A (continuous) 15 V/3 A (continuous) 9 V/3 A (continuous) 5 V/3 A (continuous)	20 V/5 A 15 V/3 A 9 V/3 A 5 V/3 A	20 V/3.25 A 15 V/3 A 9 V/3 A 5 V/3 A
Rated output voltage	19.50 V	20 VDC/15 VDC/9 VDC/5 VDC	20 VDC/15 VDC/9 VDC/5 VDC	20 VDC 15 VDC 9 VDC 5 VDC	20 VDC 15 VDC 9 VDC 5 VDC
Temperature range:					
Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)	0°C to 35°C (32°F to 95°F)	0°C to 45°C (32°F to 109°F)
Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.					

Power adapter requirements

 **NOTE:** If you did not purchase the Dell-branded power adapter that is recommended for your computer, ensure that the power adapter you use meets the following requirements.

The following table lists the power adapter requirements for your Dell Pro 14 Premium PA14260.

Table 20. Power adapter requirements

Description	Value
Power that is required from a power adapter to achieve optimal performance.	65 W
Power that charges the computer at a slower speed. i NOTE: A warning message may appear informing you about the use of a lower-powered adapter and slower charging speed.	Less than 60 W
Minimum power that is required from a power adapter to operate the computer and charge the battery. i NOTE: A warning message appears informing you about the use of a lower-powered adapter and slower charging speed.	27 W
USB Power Delivery (PD) fast charging	Supported
ExpressCharge mode	Supported i NOTE: Ensure that the computer with a 45 Wh battery is connected to a 65 W power adapter for this feature to be supported.

Battery

The following table lists the battery specifications of your Dell Pro 14 Premium PA14260.

Table 21. Battery specifications

Description	Option one	Option two
Battery type	2-cell, 40 Wh, Lithium Ion Polymer, Long Life Cycle	3-cell, 60 Wh, Lithium Ion Polymer, Long Life Cycle
Battery voltage	7.80 VDC	11.70 VDC
Battery weight (maximum)	155 gm	215 gm
Battery dimensions:		
Height	6.15 mm (0.24 in.)	6.15 mm (0.24 in.)
Width	248 mm (9.76 in.)	248 mm (9.76 in.)
Depth	65.10 mm (2.56 in.)	65.10 mm (2.56 in.)
Temperature range:		
Operating	0°C to 60°C (32°F to 140°F)	0°C to 60°C (32°F to 140°F)
Storage	-20°C to 60°C (-4°F to 140°F)	-20°C to 60°C (-4°F to 140°F)
Battery operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate) i NOTE: You can control the charging time, duration, start and end time, and so on, using the settings on the Dell Optimizer application. For more	Express Charge Method: 0°C - 15°C maximum allowable charge time from 0 to 100% RSOC is 4 hours	Express Charge Method: 0°C - 15°C maximum allowable charge time from 0 to 100% RSOC is 4 hours 16°C - 45°C normal express charge

Table 21. Battery specifications (continued)

Description	Option one	Option two
information about Dell Optimizer application, search Dell Support Site.	16°C - 45°C normal express charge 46°C - 50°C maximum allowable charge time from 0 to 100% RSOC is 3 hours Standard Charge/Predominately AC User Charge Method: 0°C - 15°C maximum allowable charge time from 0 to 100% RSOC is 4 hours 16°C - 50°C maximum allowable charge time from 0 to 100% RSOC is 3 hours Express Charge Boost Charge Method (Fast Charge for Initial 35%): 16°C - 45°C target charge time from 0 to 35% RSOC is 20 mins for Accelerated Charge	46°C - 50°C maximum allowable charge time from 0 to 100% RSOC is 3 hours Standard Charge/Predominately AC User Charge Method: 0°C - 15°C maximum allowable charge time from 0 to 100% RSOC is 4 hours 16°C - 50°C maximum allowable charge time from 0 to 100% RSOC is 3 hours Express Charge Boost Charge Method (Fast Charge for Initial 35%): 16°C - 45°C target charge time from 0 to 35% RSOC is 20 mins for Accelerated Charge
Coin-cell battery	Not supported	Not supported
CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components. CAUTION: Dell Technologies recommends that you charge the battery regularly for optimal power consumption.		

Power requirements (for 2-cell, 40 Wh battery)

NOTE: The information in this section is applicable to the European Union (EU) countries.




Figure 9. Pictogram for power charging requirements

The power that is delivered by the charger must be between a minimum of 27 Watts that is required by the radio equipment, and a maximum of 76 Watts in order to achieve the maximum charging speed.

This computer supports USB Power Delivery (PD) fast charging.

Power requirements (for 3-cell, 60 Wh battery)

NOTE: The information in this section is applicable to the European Union (EU) countries.




Figure 10. Pictogram for power charging requirements

The power that is delivered by the charger must be between a minimum of 27 Watts that is required by the radio equipment, and a maximum of 79 Watts in order to achieve the maximum charging speed.

This computer supports USB Power Delivery (PD) fast charging.

Display

The following table lists the display specifications of your Dell Pro 14 Premium PA14260.

Table 22. Display specifications

Description	Option one	Option two	Option three	Option four
Display type	14" Widescreen Ultra Extended Graphics Array (WUXGA)	14" Widescreen Ultra Extended Graphics Array (WUXGA) Lightweight	14" Wide Quad Extended Graphics Array (WQXGA)	14" Wide Quad Extended Graphics Array (WQXGA)
Display-panel technology	Wide Viewing Angle (WVA)	Wide Viewing Angle (WVA)	OLED, Wide Viewing Angle (WVA) NOTE: Computers with the WQXGA OLED configuration are only installed with the 3-cell, 60 Wh battery.	In-Plane Switching (IPS)
Display-panel dimensions (active area):				
Height	188.50 mm (7.42 in.)	188.50 mm (7.42 in.)	188.50 mm (7.42 in.)	188.50 mm (7.42 in.)
Width	301.60 mm (11.87 in.)	301.60 mm (11.87 in.)	301.60 mm (11.87 in.)	301.60 mm (11.87 in.)
Diagonal	355.60 mm (14 in.)	355.60 mm (14 in.)	355.60 mm (14 in.)	355.60 mm (14 in.)
Display-panel native resolution	1920 x 1200	1920 x 1200	2880 x 1800	2560 x 1600
Luminance (typical)	400 nits	500 nits	400 nits	400 nits
Megapixels	2.30	2.30	5.18	4.1
Color gamut	45% NTSC	100% sRGB	100% DCI-P3	100% sRGB
Pixels Per Inch (PPI)	162	162	242	216
Contrast ratio (typical)	800:1	1500:1	1000000:1	1200:1

Table 22. Display specifications (continued)

Description	Option one	Option two	Option three	Option four
Response time (maximum)	35 milliseconds	35 milliseconds	2 milliseconds	35 milliseconds
Refresh rate	48 Hz-60 Hz	30 Hz-60 Hz	30 Hz-60 Hz	48 Hz-60 Hz
Horizontal view angle	89 degrees	89 degrees	89 degrees	89 degrees
Vertical view angle	89 degrees	89 degrees	89 degrees	89 degrees
Pixel pitch	0.157 mm	0.157 mm	0.105 mm	0.118 mm
Power consumption (maximum)	3.68 W	3.03 W	5.63 W	3.75 W
Anti-glare vs glossy finish	Anti-Glare	Anti-Glare	Anti-Reflect, Narrow Border, Corning Gorilla Glass	Anti-Glare
Touch options	No	No	Yes, fingertouch support	Yes, no pen support

Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader of your Dell Pro 14 Premium PA14260.

Table 23. Fingerprint reader specifications

Description	Values
Sensor technology	Trans-capacitive sensing
Sensor resolution	500 dpi
Sensor pixel size	108 mm x 88 mm

Sensors

The following table lists the sensors of your Dell Pro 14 Premium PA14260.

Table 24. Sensors

Sensors support
Ambient Light Sensor (ALS)
Low-power vision AI-based user-presence detection
Accelerometer (for positional sensing)
Proximity for SAR compliance (for the WWAN module) near-field proximity sensor
Hall-Effect sensor (lid close)
Sensor hub

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Dell Pro 14 Premium PA14260.

Table 25. GPU—Integrated

Controller	Memory size	Processor
Intel Graphics	Shared system memory	Intel Core Ultra 5/Intel Core Ultra 7

External display support

The following table lists the external display support for your Dell Pro 14 Premium PA14260.

Table 26. External display support

Graphics card	Supported external displays with laptop display enabled	Supported external displays with laptop display disabled
Intel Graphics	3	4

Hardware security

The following table lists the hardware security of your Dell Pro 14 Premium PA14260.

Table 27. Hardware security

Hardware security
One wedge-shaped lock slot
Chassis Intrusion Detection
FIPs 140-2 certification
Trusted Platform Module TPM 2.0
Trusted Computing Group (TCG) certification for TPM
Touch fingerprint reader (palmrest/powerbutton/MoH/MoC/CV3)
SED SSD NVMe, SSD, and hard drive (Opal and non-Opal) per SDL
Statement of Non-Volatile Random-Access Memory (NVRAM)
Windows Hello - Fingerprint Reader (optional)
Mechanical privacy shutter for camera

Operating and storage environment

This table lists the operating and storage specifications of your Dell Pro 14 Premium PA14260.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 28. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)

Table 28. Computer environment (continued)

Description	Operating	Storage
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10,000 ft)	-15.2 m to 10,668 m (-49.87 ft to 35,000 ft)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.

Dell low blue light display

 **WARNING:** Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

The display on this computer is designed to minimize blue light and complies with TÜV Rheinland's requirement for low blue light displays.

Low blue light mode is enabled at the factory, so no further configuration is necessary.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 and 28 inches (50 cm and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply suitable eye drops.
- Take an extended break for 20 minutes every two hours.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.

Dell Optimizer

Dell Optimizer is an AI-based software application that allows you to customize your computer settings for power and battery, collaboration touchpad, and more.

For Dell Pro 14 Premium PA14260 with Dell Optimizer, you can:

- Extend the battery life of your computer with Intelligent Battery Extender and Dynamic Charge.
- Tune the performance, power consumption, cooling, and fan noise with selectable thermal modes.
- Access Zoom and Microsoft Teams meeting controls with the Collaboration Touchpad.
- Access and secure your computer depending on your physical presence.
- Download and redeem the apps that are purchased with your computer.

For more information about configuring and using these features, search for *Dell Optimizer* at the [Dell Support Site](#).

Dell support policy

For information about Dell support policy, search [Dell Support Site](#).

Getting help and contacting Dell Technologies

Self-help resources

You can get information and help on Dell Technologies products and services using these self-help resources:

Table 29. Self-help resources

Self-help resources	Resource location
Information about Dell Technologies products and services	Dell Site
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	Windows Support Site
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents.	Your Dell Technologies computer is uniquely identified using a Service Tag or Express Service Code. To view relevant support resources for your Dell Technologies computer, enter the Service Tag or Express Service Code at Dell Support Site. For more information about how to find the Service Tag for your computer, see Instructions on how to find your Service Tag or Serial Number.
Dell Technologies knowledge base articles	1. Go to Dell Support Site. 2. On the menu bar at the top of the Support page, select Support > Support Library. 3. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell Technologies

To contact Dell Technologies for sales, technical support, or customer service issues, see [Contact Support at Dell Support Site](#).

 **NOTE:** Availability of the services may vary depending on the country or region, and product.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell Technologies product catalog.

Revision history

Tracks all updates that are made to the document. It typically includes the date of change, version number, and a brief description of the modification. This log helps maintain transparency, accountability, and a clear timeline of progress.

Table 30. Revision history

Revision	Date	Description
A02	May 2026	• Updated the processor specifications. • Updated the processor specifications in the product comparison topic. • Updated the memory specifications.
A01	April 2026	Added note for OLED display configuration.
A00	March 2026	Original publish date.